
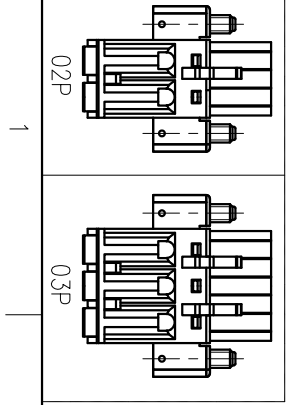
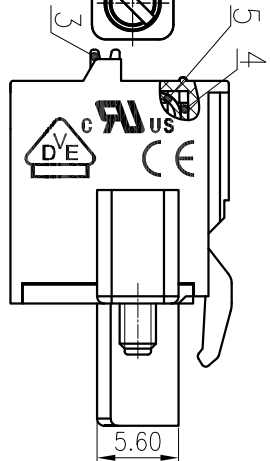
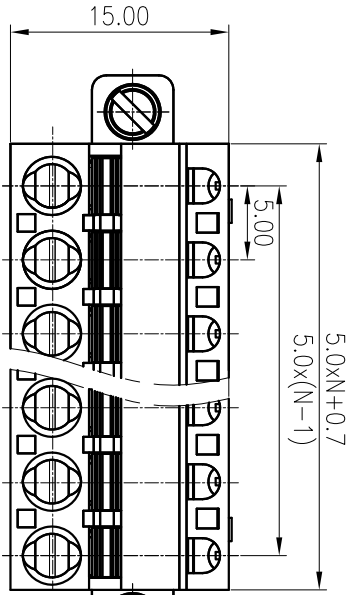
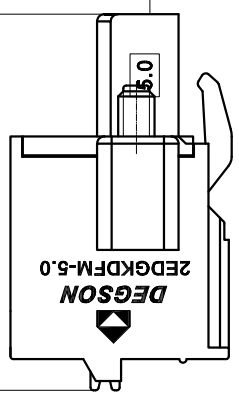


02P-Clasp on the left from this view

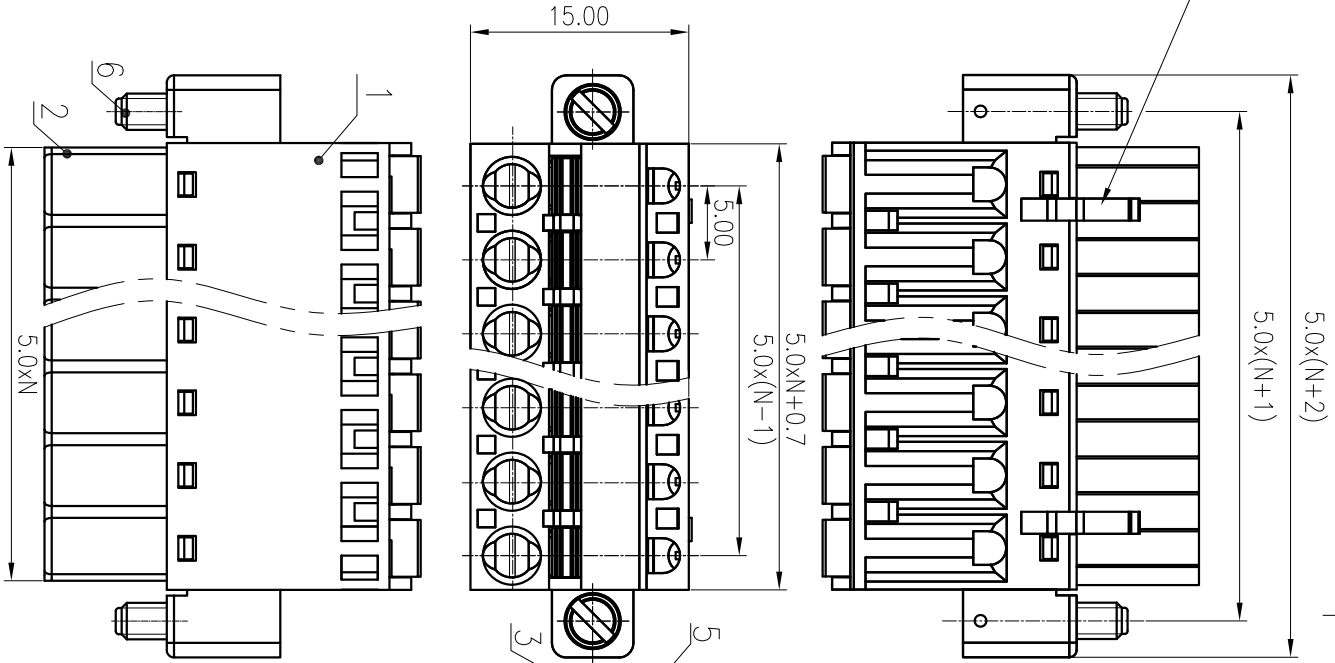

REV	ECN	DESCRIPTION	DRAFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: 2EDGKDFM-5.0-XXP-1Y-00A(H)	
APPD:	LIGL 2020.06.13	DRAWING NO.: 2EDGKDFM-5.0-C01	
CHKD:	MaEK 2020.06.13	TYPE: CUSTOMER DRAWING	
DRAFT:	LZI 2013.01.13	SCALE:	2:1
SIZE: A4		SHEET	1/1

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Button	PA66	UL94V-0
4	Clamp	Copper Alloy	Sn Plated
5	Spring	Stainless steel	
6	Screw	Steel	Zn Plated

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:			
额定电压/电涌/Rated Voltage(V)/Current(A)	III/2		
过压类别/Overvoltage Category/污染等级/Pollution Degree			
额定电压/电涌/Rated Voltage(V)/Current(A)	320/20		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4.0		
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M2.5 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/26~12		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

APPD:	LIGL 2020.06.13	NAME:	2EDGKDFM-5.0-XXP-1Y-00A(H)
CHKD:	MaEK 2020.06.13	DRAWING NO.:	2EDGKDFM-5.0-C01
DRAFT:	LZI 2013.01.13	TYPE:	CUSTOMER DRAWING
SIZE:	A4	SCALE:	2:1
SHEET	1/1	SHEET	1/1