

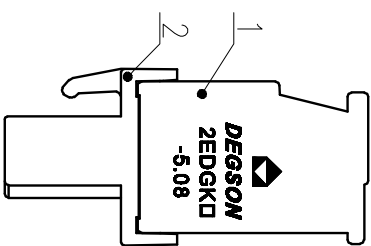
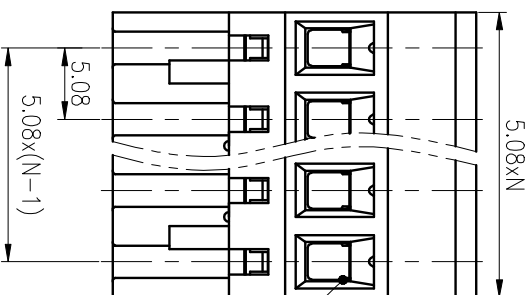
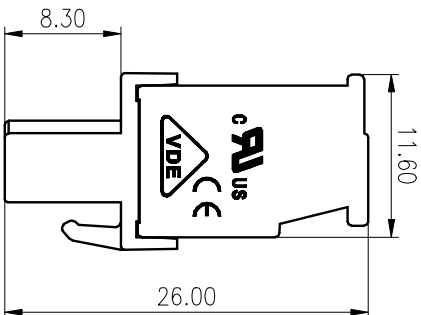


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)	
0	>3	>10	>180
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/1.0	0.1/1.0	0.1/1.0	0.1/1.0
±Z	±Z	±Z	±Z

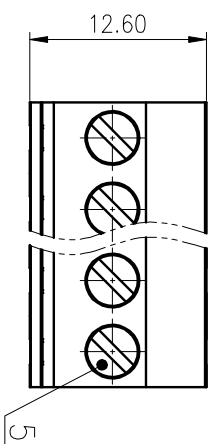

02P: Clasp on the right
from this view

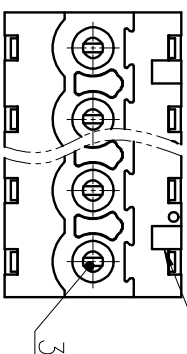

5	Screw	Steel	M3/Zn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	320/18	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	/	4	/
额定扭矩/螺栓和螺母/Torque Tightening(N·m/Lbin)	M3, 0.66/6.00		
柔性范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/28~12		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
剥线长度/Stripping length(mm)	7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: Lon CHH 2020.06.03

CHKD: Gong YZh 2020.06.03

DRT: Yin DK 2020.06.03

NAME: **DEGSON** NINGBO DEGSON ELECTRICAL CO., LTD

2EDGKA-5.08-XXP-1Y-1000A(H)

DRAWING NO.: 10002045

TYPE: CUSTOMER DRAWING

SCALE: 2:1

SHEET 1/1

REV T0

REV 1/1

SIZE: A4

DATE

DRAFT

DESCRIPTION

ECN

REV