
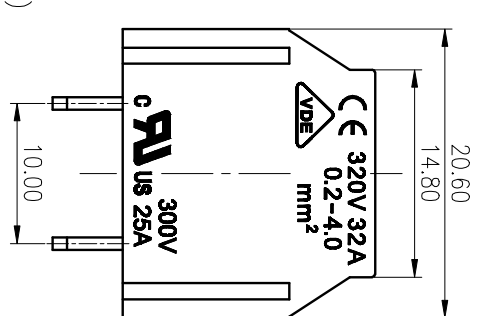
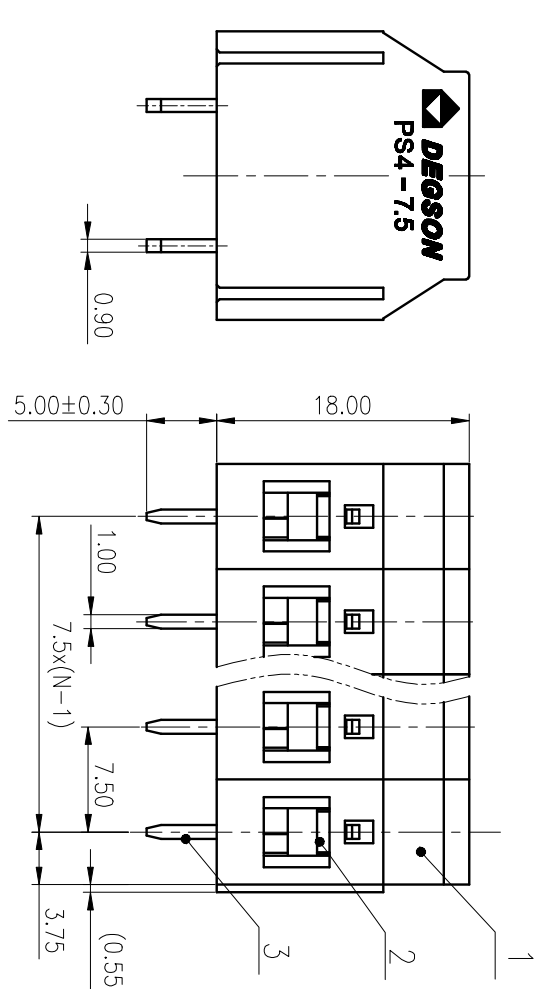
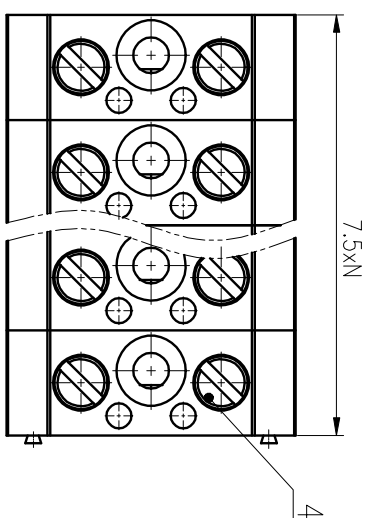


精度等级/General	公差值/Tolerances(mm)	公差值/Tolerances(mm)
0	>3	>30
~	>6	>50
3	~	>10
6	10	~
~	18	~
30	30	~
50	50	~
80	80	~
120	120	~
180	180	~
250	250	~
315	315	~
400	400	~
500	500	~
±Z	±0.12	±0.18
	±0.22	±0.26
	±0.31	±0.37
	±0.57	±0.80
	±1.05	±1.15
	±1.60	±2.20
	±2.50	
	0.1/10	
	±Z	

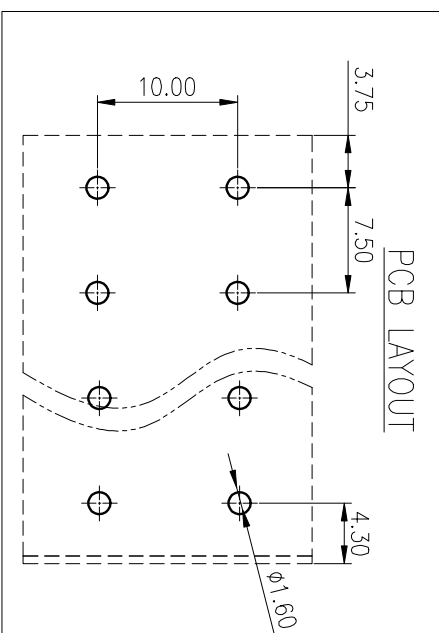

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Copper alloy	M3/Ni Plated
3	Pin header	Copper	Sn Plated
2	Cage	Copper alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/25	/	300/70
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	320/32	/
工频耐压/Withstanding voltage(V/1Min)	AC4000		
紧固扭矩/Torque Tightening(N·m/Lbin)	M3, 0.5/4.43		
绞合范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~4/24~10		
间距/Pitch(mm)/线数范围/Poles	7.5/N=01~16P		
剥线长度/Stripping length(mm)	13~14		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL: SURFACE:  
 MAT NO.: /  
 STATUS: /  
 APPD: Lon ChH 2020.05.25  
 CHKD: Yu JZh 2020.05.25  
 NAME: PS4-7.5-XXP-1Y-00A(H)  
 DRAWING NO.: 10002151  
 TYPE: CUSTOMER DRAWING  
 SCALE: 2:1  
 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				