


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±Z

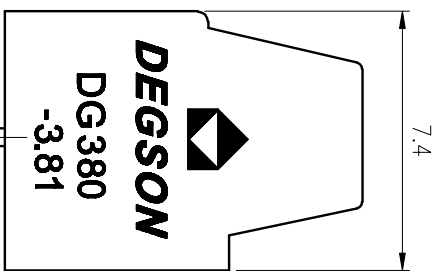

4	Screws	Steel	M2/Zn Plated
3	Cage	Copper alloy	Ni Plated
2	Pin Header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/12	/	300/10
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category/污秽等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	250/16	200/16	500/16
额定脉冲电压 (KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
额定扭矩/Torque Tightening(N.m/Lb.in)	M2, 0.2/1.77		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~1.5/30~14		
间距/Pitch(mm)/线数范围/Poles	3.81 /N=02~24P		
剥线长度/Stripping length(mm)	5~6		
使用温度范围 /Operating Temperature(°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		
标准颜色编号 /Standard color number:			
PANTONE / RAL	/		

MATERIAL: SURFACE: /

MAT NO.: /  
 STATUS: /  
 APPD: Li GL 2020.06.15  
 CHKD: Mao J 2020.06.15  
 DRT:Wgng LX 2020.06.15

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**  
**DG380-3.81-XXP-1Y-00A(H)**

DRAWING NO.: DG380-3.81-C01  
 TYPE: CUSTOMER DRAWING  
 SCALE: 5:1  
 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE