


Pitch range in mm	Nominal dimension range	
	mm	In mm
Over 6	Over 10	Over 30
TO 6	TO 10	TO 30
Over 10	Over 24	Over 60
TO 10	TO 24	TO 60
Over 30	Over 100	Over 150
TO 30	TO 100	TO 150
Over 60	Over 150	Over 200
TO 60	TO 150	TO 200
Over 100	Over 200	Over 300
TO 100	TO 200	TO 300
Over 150	Over 300	Over 400
TO 150	TO 300	TO 400

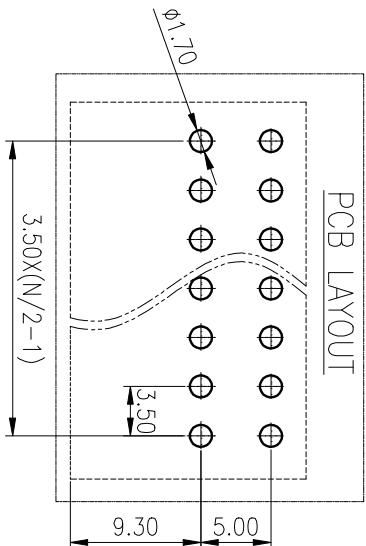

3	Pin 1	Copper	Sn Plated
2	Pin 1	Copper	Sn Plated
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/10	/	/
IEC 标准 / IEC Standard:	/	/	/
过压类别 / Overvoltage Category / 污染等	III/3	III/2	II/3
绝缘 / Pollution Degree	/	/	/
额定电压/电涌 / Rated Voltage(V)/Current(A)	/	/	250/10
额定电涌电压 (kV) / Rate Impulse Voltage (kV)	/	/	2.5
间距 / Pitch (mm) / 线数 / Poles	3.50	N=0~48P	
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合 RoHS 要求 / Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: Valid

APPD: /

CHKD: /

DRT: ZX 2017.03.23

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 2:1

SHEET 1/1

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

8EDGRHB-3.5-XXP-1Y-01A(H)

DRAWING NO.: 8EDGRHB-3.5-C02

REV T0