


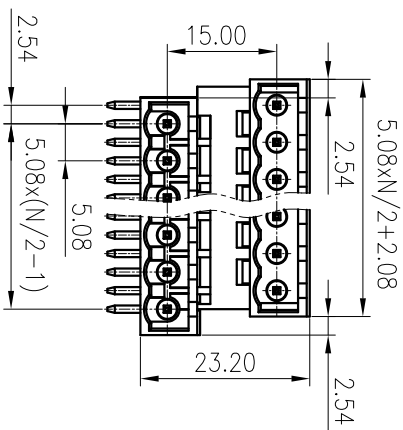
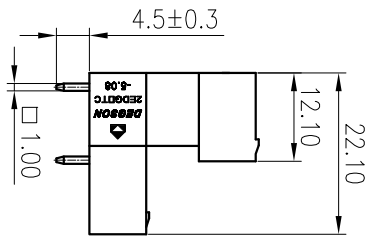


标注公差/General tolerances(mm)												0.1/10															
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10														
~	~	~	~	~	~	~	~	~	~	~	~	>500															
3	6	10	18	30	50	80	120	180	250	315	400	500															
±0.12		±0.18		±0.22		±0.26		±0.31		±0.37		±0.57		±0.80		±0.93		±1.05		±1.15		±1.60		±2.20		±2.50	



PCB LAYOUT

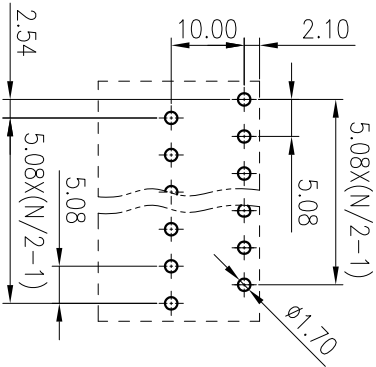

ITEM	NAME OF PART	MATERIAL	NOTES
4	Short Pin	Copper	Sn Plated
3	Long Pin	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/Rated Voltage(V)	Current(A)	300/15	/	300/10
VDE 标准/VDE Standard:				
过压类别/Overvoltage Category/污染等级		III/3	III/2	II/2
额定电压/电流/Reted Voltage(V)/Current(A)		/	320/10	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4.0	/
间距/Pitch(mm)		5.08		
整体式/One-block/拼接式/Inter locking		N=04~24P/N=24~48P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

SURFACE: /

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: LanChH 2020.06.01

CHKD: GongYzH 2020.06.01

DRFT: ZhYP 2020.06.01

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 2EDGRTC-5.08-XXP-1Y-00A(H)

DRAWING NO.: 100002264

SIZE: A4

mm
Inch

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV T0
SHEET 1/1

REV

ECN

DESCRIPTION

DRFT

DATE

SIZE: A4

mm
Inch

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV T0
SHEET 1/1