


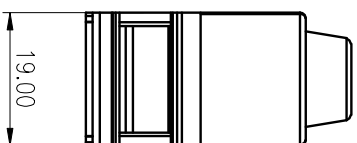
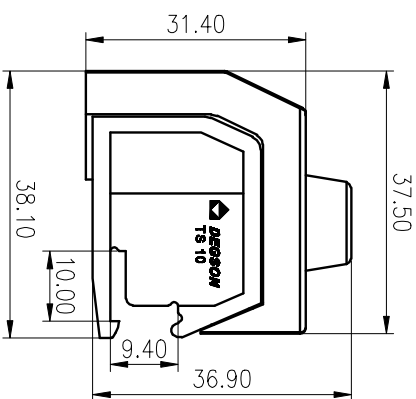
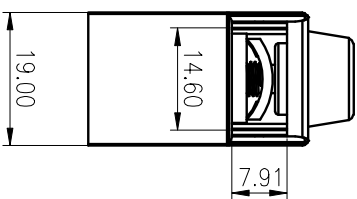


公差等级/General Tolerances(mm)		0.1/1/10	
0	>3	>6	>120
~	~	~	~
3	6	10	180
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
±Z	±Z	±Z	±Z

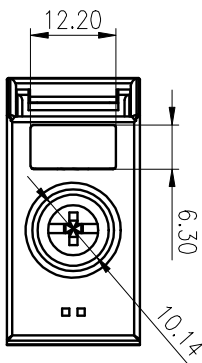

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	TS10-C02	
APPD:	/	DRAWING NO.: TS10-C02	
CHKD:	/	TYPE: CUSTOMER DRAWING	
DRT: CenWZ 2020.05.18	/	SCALE: 1:1	
REV	ECN	DESCRIPTION	DRT DATE
1	2	3	4
1/1			

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	M5/Zn Plated
3	Current carrier	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/55	300/55	/
IEC 标准/IEC Standard:	/		
过压类别/Overvoltage Category/标称等	III/2		
绝缘/Insulation Degree	750/57		
额定电压/电压/Rated Voltage(V)/Current(A)	AC8000V/1Min		
工频耐压/Withstanding voltage	M5, 2.0/17.71		
螺栓扭矩/Torque Tightening(N·m/Lb·in)	4.0~10/12~6		
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AMG)	15-17		
剥线长度/Stripping length(mm)	-40~+105		
使用温度范围/Operating Temperature(°C)	Yes		
符合RoHS环保要求/Conform to RoHS	RAL 2000		
标准颜色编号/Standard color number: RAL	RAL 2000		

D

C

B

A

D

C

B

A

2

3

4

5

6

1

2

3

4

5

6