

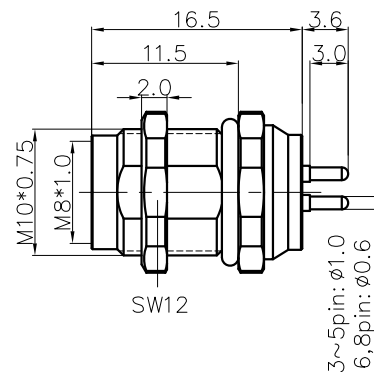


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



Panel cut

SP-M8X-XXP-FF-SF7001-00A(H)

Coding: A,B

Pin number: 03,04,  
05,06,08

NOTES:

- Rated voltage/current : 3pin: 60V / 3A  
4pin: 60V / 3A  
5pin: 30V / 3A  
6pin: 30V / 1.5A  
8pin: 30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min  
5,6,8pin: AC650V/1Min

- Levels of protection: IP67
- Wire connection mode: soldering(PCB)
- Operating temperature: -40°C~+105°C
- For Panel Thickness Range: 2.0~4.5mm
- RoHS Compliance

- 8.Tolerance :
- .X ±0.25mm
  - .XX ±0.1mm
  - ∠ ±1°

3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
PCB layout	PCB layout	PCB layout	PCB layout	PCB layout

DETACHED LISTS	PART NO.: SPM8XXXPF700100AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SP-M8X-XXP-FF-SF7001-00A(H)		
	DRFT: SQ 2019.05.17	TITLE: CUSTOMER DRAWING	REV: D0-1	A
	THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET: 1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE: 1:1