
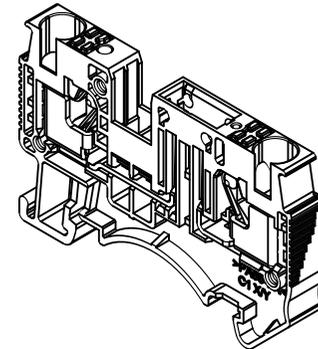
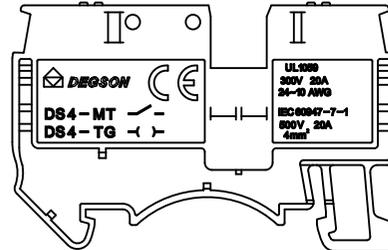
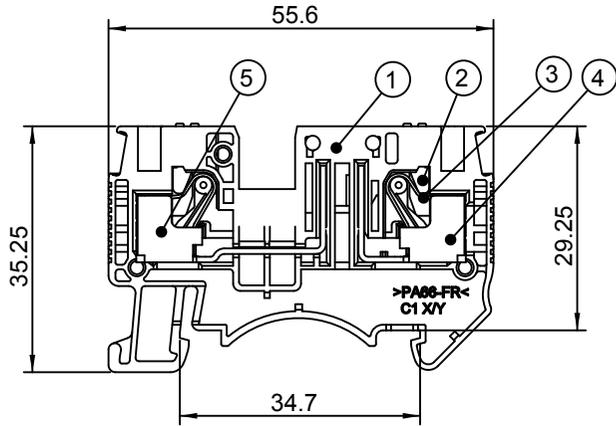


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制、传播、利用、交回本文件的内容，侵犯者将承担法律责任。未经许可擅自复制、传播、利用、交回本文件的所有权利。

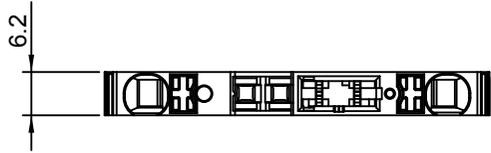

公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/ U.L. Standard:	B	C	D
额定电压/ 电流/ Rated Voltage(V)/ Current(A)	300V 20	300V 20	/
IEC 标准/ IEC Standard:			
过压类别/ Overvoltage Category/ 污染等级/ Pollution Degree	III/ 3	III/ 2	II/ 2
额定电压/ 电流/ Rated Voltage(V)/ Current(A)	500/ 20	/	/
额定脉冲电压(KV)/ Rate Impulse Voltage(KV)	6	/	/
线径范围(硬线和软线)/ Wre Range(rigid and flexible)(AWG mm²)	24~10 / 0.2~4.6 (Sol)		
剥线长度/ Stripping length(mm)	11~13		
使用温度范围/ Operating temperature(°C)	- 40~+ 105		
符合 RoHS环保要求/ Conform to RoHS	Yes		

ITEM	NAME OF PART	MATERIAL	NOTES
5	Long current carrier	Copper	Sn plated
4	Short current carrier	Copper	Sn plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0

		MATERIAL:	/	SURFACE:	/
APPD: Li GL 2022.05.16		MAT NO./REV:	/	MAT STATUS:	/
CHKD: Ma EK 2022.05.13		NAME DS4-TG-01P-1Y-00A (H)			
DRFT: Wang LX 2022.05.13		DRAWING NO.	/	TYPE	CUSTOMER DRAWING
REV	ECN	DESCRIPTION	DRFT	DATE	SCALE
00	/	/	Wang LX	2022.05.13	1:1
					SHEET
					1/1