

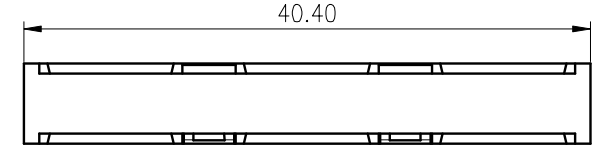

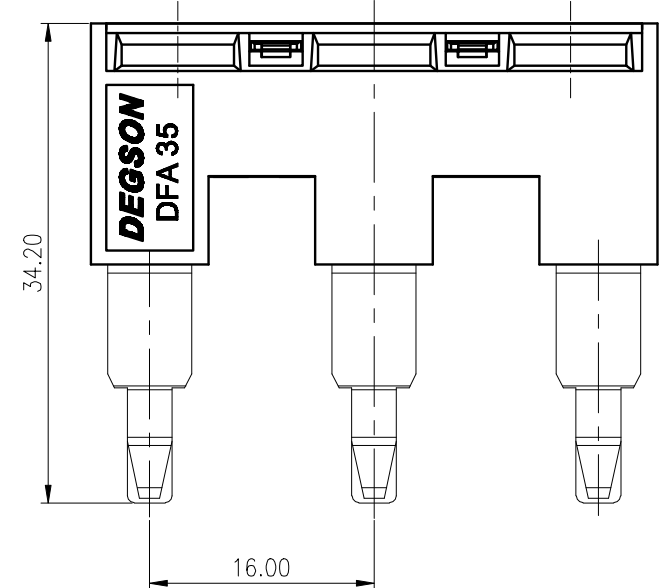


未注公差/General tolerances(mm)											0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

A

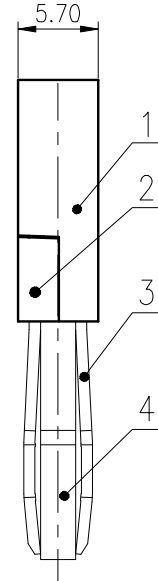

B

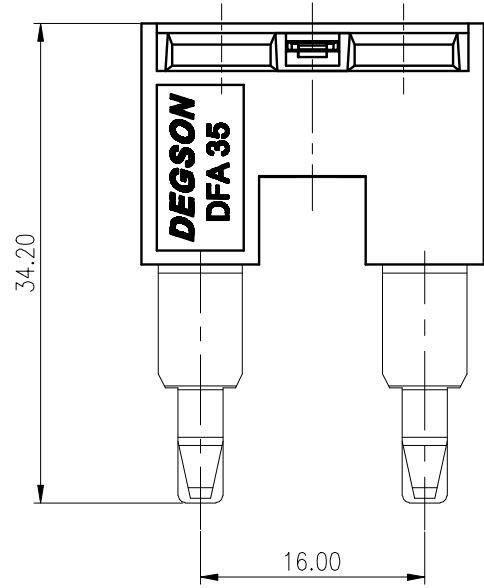

C

02P

03P

D

间距/Pitch(mm)/线数范围/Poles	16.00/02P,03P
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

ITEM	NAME OF PART	MATERIAL	NOTES
4	Bridgware 2	Copper	Sn Plated
3	Bridgware 1	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL: /	SURFACE: /	
MAT NO.: /	<b>宁波高松电子有限公司</b> <b>NINGBO DEGSON ELECTRICAL CO., LTD</b>	
STATUS: /		
APPD: Li GL 2020.06.04	NAME: <b>DFA35-XXP-1Y-00A(H)</b>	
CHKD: Mao J 2020.06.04	DRAWING NO.: DFA35-C01	
DRFT: ZhengQC 2020.06.04	REV	T1
④	SIZE: A4	TYPE: CUSTOMER DRAWING
mm (inch)	SCALE: 2:1	SHEET 1/1

1

2

3

4

5

6