
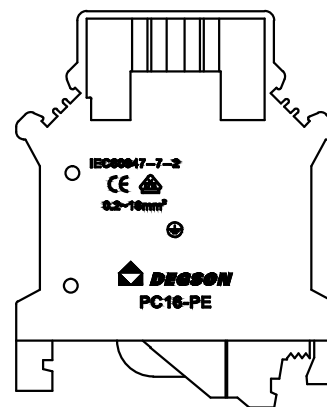
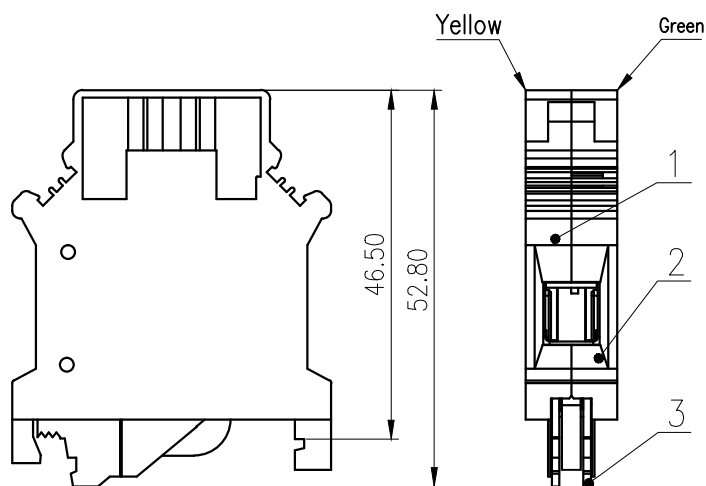


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

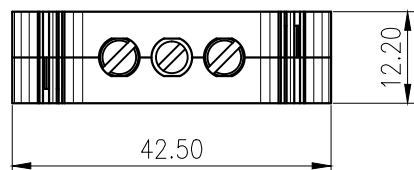


3	Ground contact			
2	Housing2	PA66	UL94V-0	
1	Housing1	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	/
EC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8.0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~16/12~4		
间距/Pitch(mm)		12.20		
剥线长度/Stripping length(mm)		11~12		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: PANTONE / RAL		/		

MATERIAL:		SURFACE:		
MAT NO.:	/	宁波高松电子有限公司 DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS:	/			
APPD:	Li GL 2020.04.02			
CHKD:	Mao J 2020.04.02			
DRFT:	Zhuwm 2020.04.02	NAME: PC16-PE-01P-1Y-00A(H)		
DRAWING NO.:		PC16-PE-C01	REV	T2
TYPE: CUSTOMER DRAWING		SCALE: 1/1	SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE



SIZE: A4



TYPE: CUSTOMER DRAWING

SCALE: 1/1

SHEET

1/1