

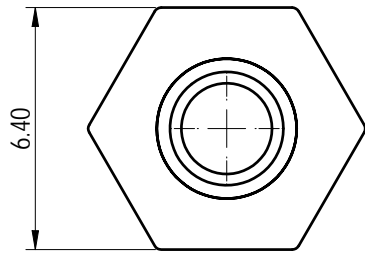
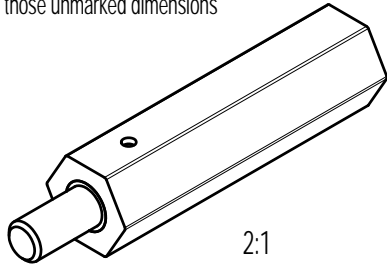


未注公差/General tolerances (mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

please refer to the 3D model, for those unmarked dimensions

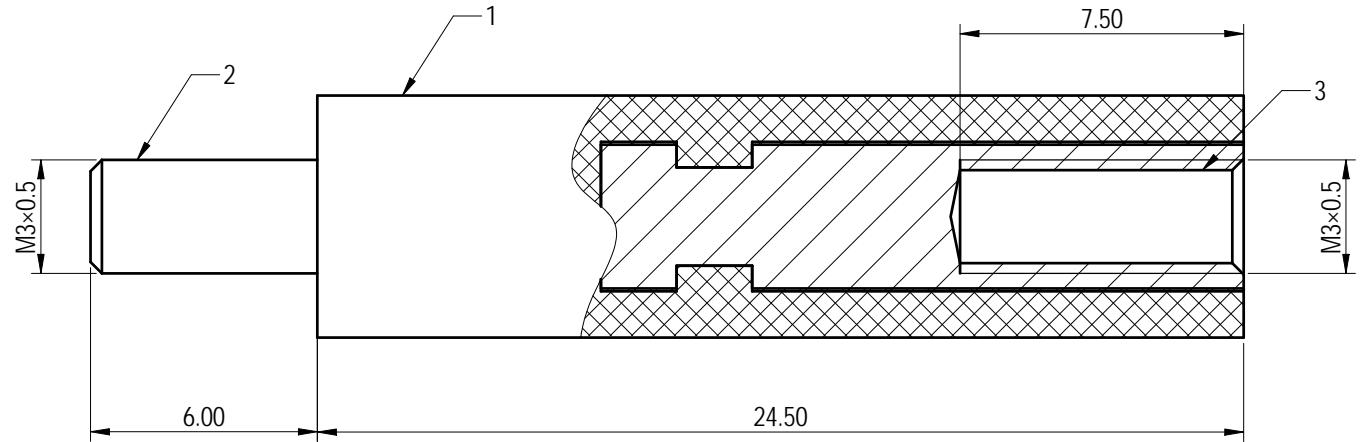

PCB LAYOUT

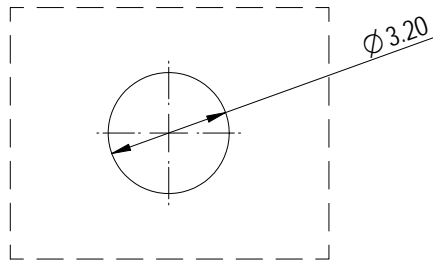

Note: The A&Z(H) in the name means: A(H) and Z(H).

技术要求/Technical requirements:			
螺丝扭矩/Tightening torque (Nm/Lb.in)		M3.0.6/5.32	
使用温度范围/Operating temperature (°C)		-40~+105	
3	Nut	Steel	M3 Ni Plated
2	Screw	Steel	M3 Ni Plated
1	Housing	PA66+GF	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSON		MATERIAL:		SURFACE/COLOR:	
MAT NO./REV:		/ 02		MAT STATUS: 批量	
APPD: 蓝贵凡	2023.06.15	NAME			
CHKD: 曹利彬	2023.06.15	DG005-01P-1Y-00A&Z(H)			
DRFT: 孙科豪	2023.06.15	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200077756	CUSTOMER DRAWING	已发布	5:1
					SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless explicitly authorized in writing by Degson. All rights reserved for patent, utility model or designer registrations. 除专利权明确授权外, 否则禁止转让、复制、引用、发布本文件的任何内容。未经明确授权, 严禁复制或传播本文件内容。所有权利均保留给 Degson 公司。如有侵犯, 请及时联系 Degson 公司。